


# DRILL OFF INSTRUCTIONS

## Lockup Lock Body

If you have been instructed by a Lockup customer support representative to drill off your non-responsive Lockup, please follow the following steps:

- 1) Use either a 3/16 in (4.76 mm) or 1/4" in (6.35 mm) drill bit attached to a power drill.
- 2) There are two spots to drill on the Digilock to back out the mounting screws. This will allow you to safely remove the lock without damaging the door.
- 3) The first and second drill points are displayed below: Lockup Lock Unit
- 4) Line up the drill bit where demonstrated and drill through the keypad only – approximately 5/8 in (15.88 mm).
- 5) After drilling is complete, remove the front unit.
- 6) If the rear unit of the lock did not fall (thus unlocking the door) press gently on the rear until it falls and open the door.

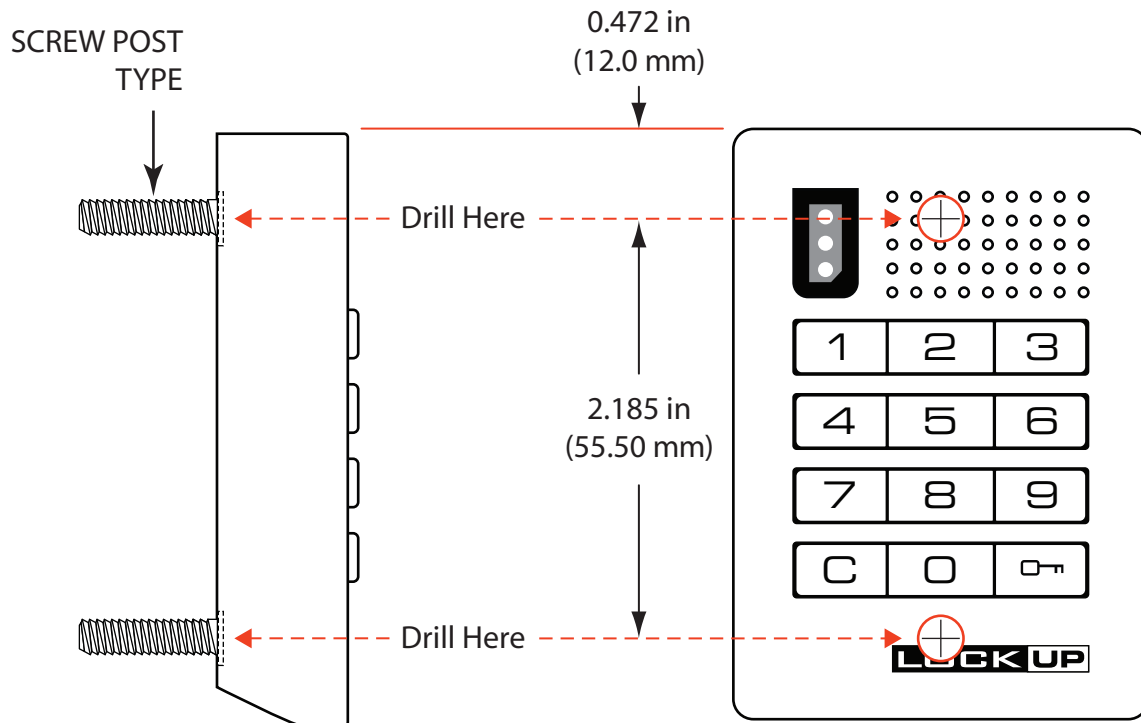

**Note:** Do not discard any lock parts - Return all parts to SPI with an assigned Return Merchandise Authorization (RMA) number. If you have any questions or need an RMA#, please contact LockUp Customer Support at: 1-800-590-0984